




CNC Hydraulic Shearing Machine

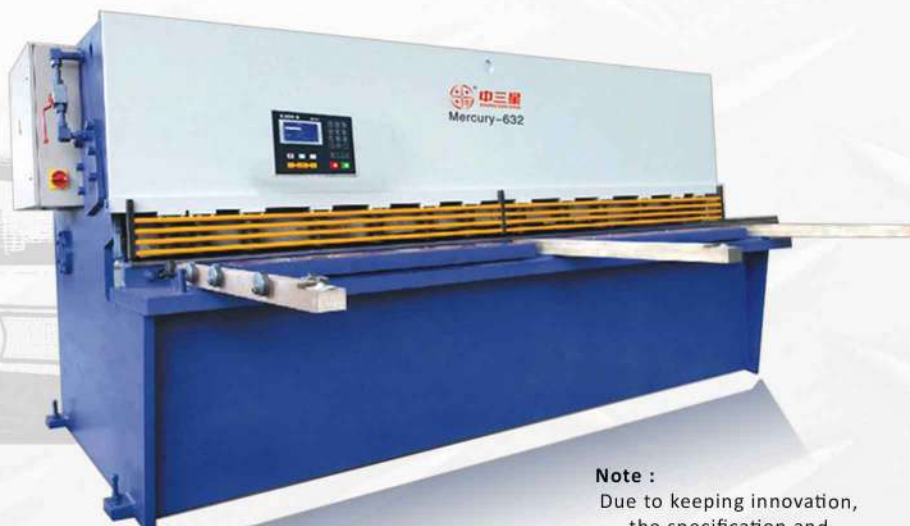

Note :

Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!

Main features

- > All-steel welded structure to relieve the internal stress.
- > Adopt advanced integrated hydraulic system. good reliability.
- > Three-point support flowing guide rail to relieve the clearance between the supports ensuring the quality of shearing.
- > The toolpost apply inward inclined structure, easy to cut material improved the work precision.
- > Nibbling shear, stepless regulate the route of top knife block.
- > High-performanced servo motor and drive.
- > With lighting alignment device easy to ensure the precision.

Main Specifications

Specifications		Parameters	Mercury425	Mercury432	Mercury625	Mercury632
Max. Cutting tickness		mm	4	4	6	6
Max. Cutting length		mm	2500	3200	2500	3200
Distance between frames		mm	2720	3420	2720	3420
Stroke per minutes		minutes	16	13	15	12
Back gauge range		mm	500	500	600	600
Cutting angle		dergree	1.5	1.5	1.5	1.5
Height of work table		mm	800	800	800	800
Depth of throat		mm	250	250	250	250
Main motor power (KW)		KW	5.5	5.5	7.5	7.5
Oil tank capacity (L)		mm	240	290	240	290
Overall dimensions	Length	mm	3100	3840	3100	3840
	Width	mm	1610	1610	1610	1610
	Heigth	mm	1620	1620	1620	1620
Net weight		Kg	4800	6400	5500	6600