



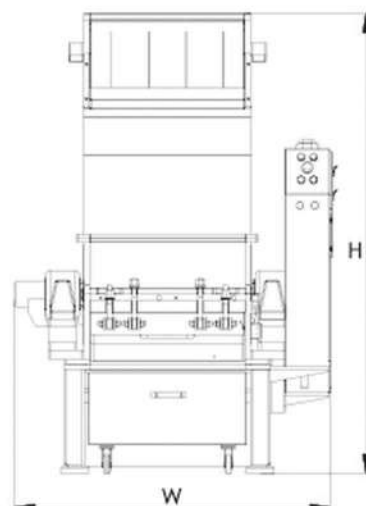

► RG-3660GX

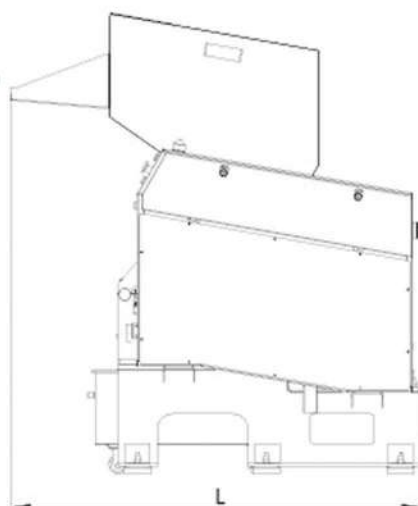

► Specifications 规格表

机型 Model		强力粉碎机 Powerful granulator					
		RG-2640G	RG-2650G	RG-3660G	RG-3680G	RG-4680G	RG-46100G
电机功率 Power	kw	7.5	11	15	22	22	30
主轴转速 Rotor speed	rpm	560	560	560	560	560	560
转动刀 Rotating blades		pcs	12	15	6	6	6
	-A	pcs	24	30	36	48	60
	-B	pcs		18	24	24	30
固定刀 Fixed blades	pcs	2	4	4	4	4	6
筛网孔径 Screen Diameter	mm	φ 10	φ 10	φ 12	φ 12	φ 12	φ 12
粉碎室尺寸 Cutting Chamber Size	mm	320 × 400	320 × 500	460 × 600	460 × 800	560 × 800	560 × 1000
粉碎能力 Output	kg/h	300~550	400~650	400~700	600~900	700~1200	800~1600
粉碎时噪音 Noise	dB(A)	80~95	80~95	80~95	80~95	80~95	80~95
进料斗电动起落 Motor Lifting Device for Hopper		●	●	●	●	●	●
人工接料箱 Material box		●	●	●	●	●	●
风机送料系统 Blower conveying system	-F	○	○	○	○	○	○
带卷料系统 Slow Speed Granulator	-X	○	○	○	○	○	○
进料口加磁铁 Fixed magnet at feeding mouth		○	○	○	○	○	○
粉尘分离系统 Dust separator system		○	○	○	○	○	○
重量 Weight	kg	550	650	1200	1350	1690	1850
外形尺寸 External size							
L	mm	1300	1300	1660	1660	1845	1845
W	mm	1080	1180	1300	1500	1560	1760
H	mm	1435	1435	1855	1855	2170	2170

产品规格若有变更,恕不另行通知。Please excuse for not note if some specifications of products are changed.

Note 注:

- 1) "●" is standar allocation, "○" is optional purchase;
- 2) Standard RG-26G are flat blades type, "-A" means claw blades type;
- 3) Standard RG-36G/46G are "V" shaped paddle blades type, "-A" means claw blades type, "-B" means flat blades type;
- 4) The max. output depends on screen dia. and material quality;
- 5) The varied noise depend on varied material;
- 6) The standard power voltage is 3φ 380V 50Hz; other voltage is available.

- 1) "●" 为标配件, "○" 为选配件。
- 2) RG-26G标配为平刀型结构, "-A"为爪刀结构。
- 3) RG-36G/46G标配为片刀型结构, "-A"为爪刀结构, "-B"为平刀型结构。
- 4) 最大粉碎量取决于筛网孔径和粉碎材料等因素。
- 5) 粉碎时噪音因粉碎材料不同而各异。
- 6) 机器电压规格为3φ 380V 50Hz。

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!