
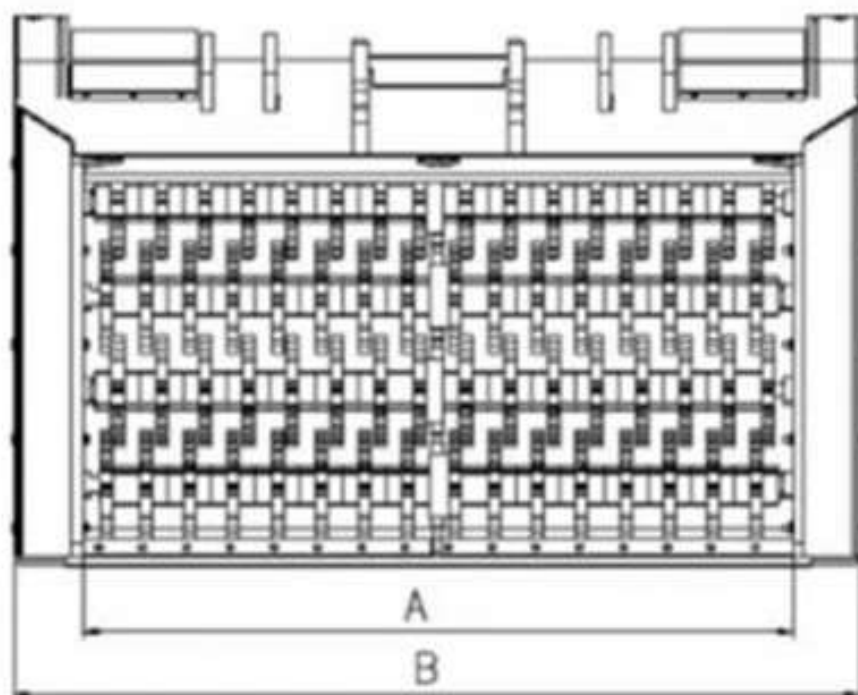


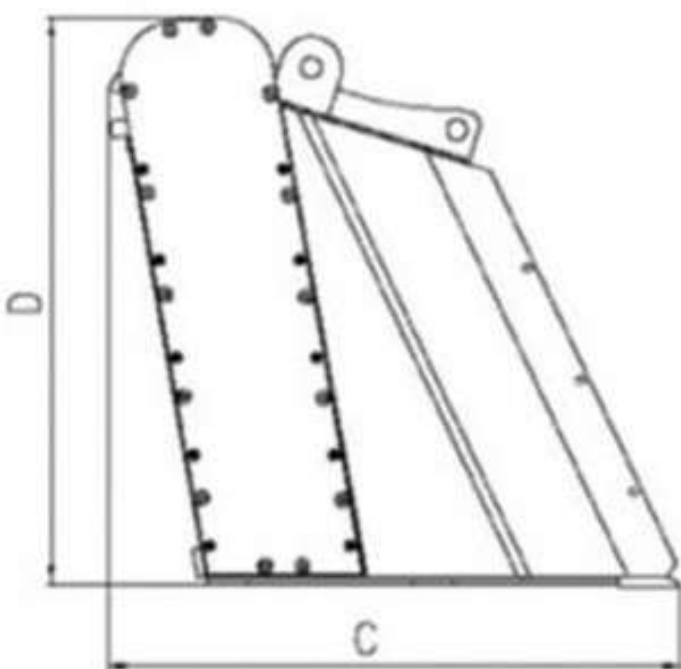

		MM062	MM104	MM154	MM184	MM234
Excavator Tonnage	t	10 - 16	16 - 24	21 - 34	28 - 45	30 - 50
Loader Tonnage	t		6 - 7	7 - 14	90 - 16	12 - 19
Product Weight	kg	1250	1950	2600	3100	3400
Volume	m ³	0,6/0,75	1,2/1,4	1,7/1,9	1,8/2,1	2,5/3,0
Screening Area	m ²	0,68	1,2	1,8	1,8	2,5
Shell width (B)	mm	1470	1470	2125	2125	2698
Screening Width (A)	mm	1142	1142	1788	1788	2300
Depth (C)	mm	1180	1356	1356	1356	1501
Height (D)	mm	909	1372	1372	1372	1610
Pressure Range	bar	120 - 140	160 - 200	160 - 200	160 - 200	160 - 200
Oil Flow Range	l/min	100 - 120	160 - 230	160 - 230	160 - 230	160 - 230
Back pressure	bar	30	30	30	30	30
Maximum back pressure of oil discharge pipe bar	bar	40	40	40	40	40
Hose		JIC 1 5/16	JIC 1 5/8	JIC 1 5/8	JIC 1 5/8	JIC 1 5/8

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!