



## Sand Washer

X D Series Sand Washer is a high-efficient sand washing machine, which is produced on the basis of customers' practices and feedbacks since long time. The special design for the transmission part, which is separated from water and sand, enables its low maintenance. It features reasonable structure, high capacity, energy saving, etc. It is the best choice for our customers in sand and stone industry. LSX Series Spiral Sand Washer features at high capacity, high cleaning, etc. There are two sorts for LSX Series Spiral Sand Washer, that is: single spiral and double spiral, both can be widely used in metallurgy, construction, water and electricity industry.

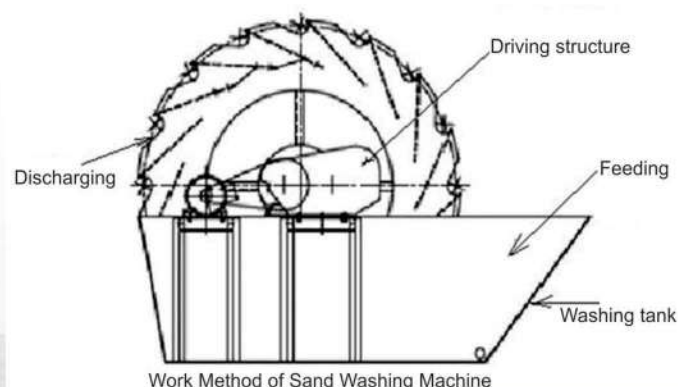

### Specification and Technical Parameter

| Model                 | XSD2610        | XSD3016        | XSD3016        |
|-----------------------|----------------|----------------|----------------|
| Wheel Diameter(mm)    | 2600           | 3000           | 3600           |
| Feeding size(mm)      | ≤10            | ≤10            | ≤10            |
| Capacity (t/h)        | 40 ~ 80        | 80 ~ 160       | 150 ~ 300      |
| Power (kw)            | 7.5            | 15             | 18.5           |
| Overall dimension(mm) | 3320x2125x2670 | 4500x3206x3480 | 4500x3206x3480 |

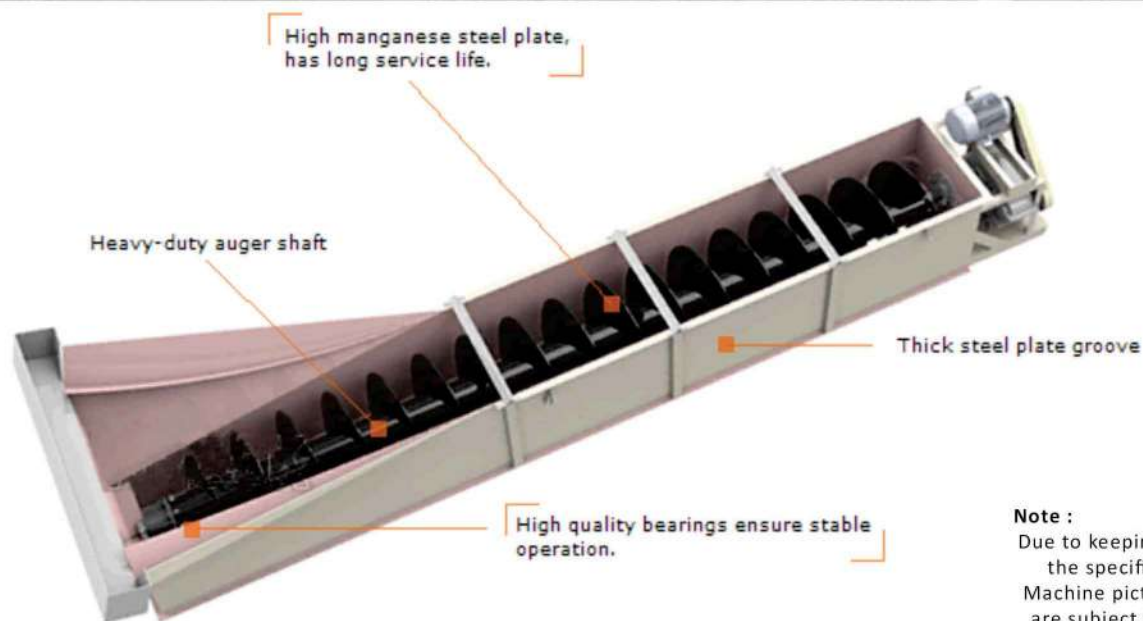

**Note :**  
Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!

### Specification and Technical Parameter

| Model                   | LSX-920 | 2LSX-920 | LSX-1120 | 2LSX-1120 |
|-------------------------|---------|----------|----------|-----------|
| Number of Screw (Pcs)   | 1       | 2        | 1        | 2         |
| Screw Diameter (mm)     | 920     | 920      | 1120     | 1120      |
| Tub Length (mm)         | 7585    | 7585     | 9750     | 9750      |
| Feeding Size (mm)       | ≤10     | ≤10      | ≤10      | ≤10       |
| Capacity (t/h)          | 100     | 200      | 175      | 350       |
| Screw Speed (r/min)     | 21      | 21       | 17       | 17        |
| Required Power (kw)     | 11      | 11×2     | 18.5     | 18.5×2    |
| Water Requirement (t/h) | 10      | 20-160   | 20-150   | 40-300    |
| Weight (t)              | 6.2     | 11.5     | 10.9     | 17.8      |