




Hydraulic Upper Roller Universal Plate Rolling Machine

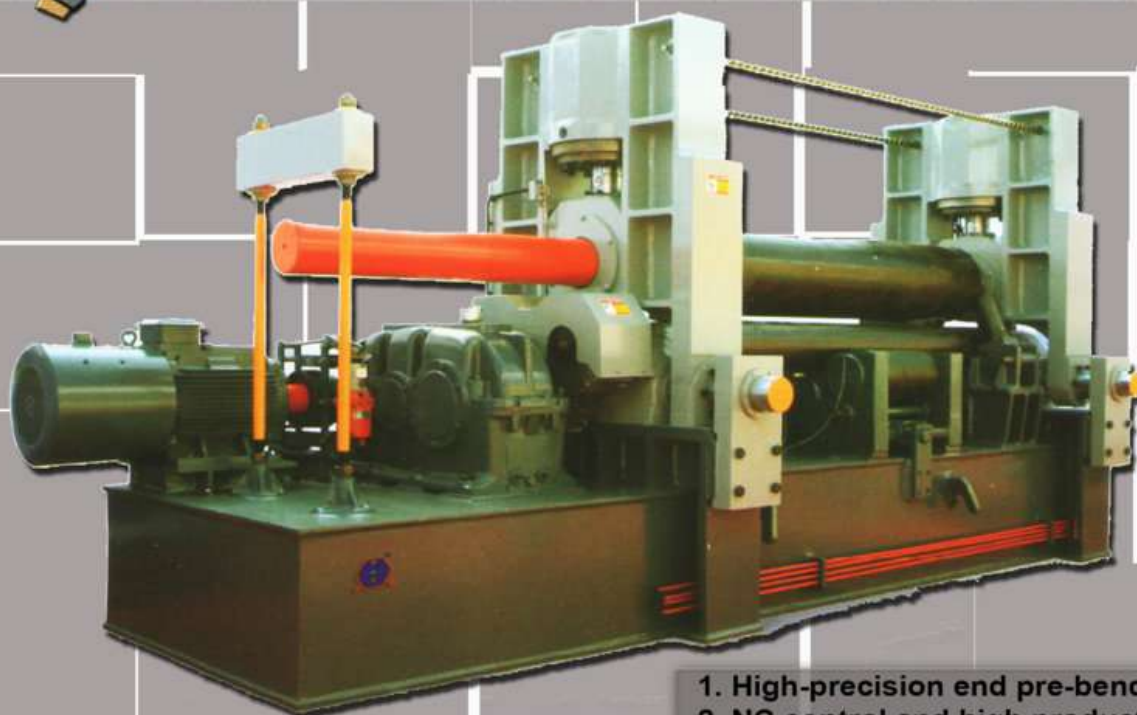

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!

1. High-precision end pre-bending
2. NC control and high production efficiency.
Products with pre eminent precision;
3. Safety operation;
4. Structure of whole set with simple base and **CONVENIENCE** for movement;
5. Multiple use with correspondent control;
6. Rich in bending shape

Type	Max Thickness of Prebend (mm)	Max Thickness of Plate (mm)	Max Width of Plate (mm)	Plate yield limit (Mpa)	Dia. of upper roller (mm)	Dia. of Lower roller (mm)	Center Distance of lower roller (mm)	Motor Power (KW)	
								Roller rotation	Hydraulic system
W11S-6×1500	4.5	6	1500	245	175	125	160	3	2.2
W11S-6×2000	4.5	6	2000	245	180	125	160	3	2.2
W11S-6×2500	4.5	6	2500	245	235	135	180	4	2.2
W11S-6×3200	4.5	6	3200	245	245	145	200	7.5	4
W11S-8×2000	6	8	2000	245	220	135	180	4	2.2
W11S-8×2500	6	8	2500	245	240	135	180	5.5	4
W11S-12×2000	10	12	2000	245	250	145	200	7.5	4
W11S-12×2500	10	12	2500	245	270	150	245	11	5.5
W11S-12×3000	10	12	3000	245	300	165	270	15	5.5
W11S-16×2000	12	16	2000	245	260	150	245	11	5.5
W11S-16×2500	12	16	2500	245	300	165	270	15	5.5
W11S-16×3200	12	16	3200	245	350	180	400	18.5	7.5
W11S-20×2000	16	20	2000	245	300	165	270	15	7.5
W11S-20×2500	16	20	2500	245	340	180	300	18.5	7.5
W11S-25×2000	20	25	2000	245	340	180	300	18.5	7.5
W11S-25×2500	20	25	2500	245	380	220	360	22	7.5
W11S-30×2500	25	30	2500	245	430	235	380	30	11
W11S-30×3000	25	30	3000	245	460	250	400	37	15
W11S-30×3200	25	30	3200	245	510	275	460	45	15
W11S-30×4000	25	30	4000	245	590	290	500	45	22
W11S-40×2000	35	40	2000	245	480	260	420	37	22
W11S-40×2500	35	40	2500	245	520	290	500	55	22
W11S-40×3000	35	40	3000	245	560	290	500	55	22
W11S-40×4000	35	40	4000	245	610	360	650	75	30
W11S-50×3200	40	50	3200	245	610	360	700	75	30
W11S-50×4000	40	50	4000	245	700	380	700	90	30
W11S-60×3000	50	60	3000	245	650	380	700	75	30
W11S-60×4000	50	60	4000	245	780	440	820	110	37
W11S-60×5000	50	60	5000	245	850	460	880	110	37
W11S-70×3000	70	70	3000	245	710	420	780	75	37
W11S-80×2500	70	80	2500	245	710	420	780	75	37
W11S-80×3000	70	80	3000	245	770	460	880	90	37
W11S-90×3000	80	90	3000	245	825	480	920	110	45
W11S-100×3000	90	100	3000	245	860	520	1000	110	45
W11S-120×3000	110	120	3000	245	960	600	1120	160	75