


Sublimation Printer & Heat Transfer Printer


Note :

Due to keeping innovation,
the specification and
Machine pictures or color
are subject to alteration
without notice!



Digital Belt Textile Printer

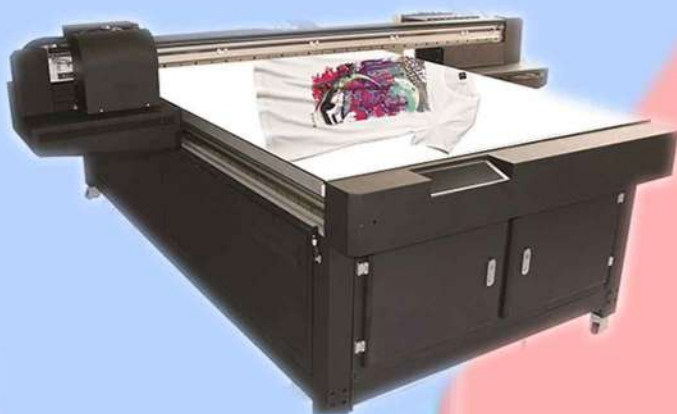

Flatbed Textile Printer

Item	MT-Sublimation 7702	
Print head	Two DX7 Drop-on-demand Micro-Piezo Print Heads	
Number of Nozzles	2880 Nozzles (2 Heads)	
Color	4 colors : Cyan, Magenta, Yellow, Black	
Height of print head	2.5mm	
Size of ink-droplet	1.5pl-21pl	
Printing width	1.8m	
Speed	3 pass	34.5sqm/h
	4 pass	26.5sqm/h
	5 pass	13.0sqm/h
Ink	Sublimation textile ink, Reactive textile ink, Pigment textile ink, Acid textile ink	
Max. Print Width	1800mm	
Max. Media Width	1900mm (max)	
Resolution	1440dpi (max)	
Real Time Tracking	None	
Media Feeder	Yes	
Media Take-up	Yes	
Material	max. weight	70kgs
	application type	Weave or knit cotton, fax silk, heat transfer paper, polyester, cashmere, towel ect.
Auto cleaning system	Yes	
Interface	USB2.0	
Power/Power Voltage	AC220-240V 50-60HZ or AC110-120V 50-60HZ	
Control Software	Print Console	
Rip Software	Iprint 3.0	
Operation System	MS Windows XP & Windows 7	
Printing Environment	Temperature : 20-25 centi degree, Humidity : 40-60%	
Picture Type	JPG PSD TIF	
Printer Dimension	W2840*D900*H1250mm	
Packing Dimension	W2920*D930*H730mm	
Net Weight	220kgs	
Gross Weight	300kgs	

Item	MT-Belt-Textile7702L	MT-Belt-Textile7702
Print head	Two DX7 Drop-on-demand Micro-Piezo Print Heads	
Number of Nozzles	2880 Nozzles (2 Heads)	
Color	4 colors : Cyan, Magenta, Yellow, Black	
Height of print head	2.5mm	
Size of ink-droplet	1.5pl-21pl	
Printing width	3.2m	
Speed	3 pass	42.5sqm/h
	4 pass	34.0sqm/h
	8 pass	18.0sqm/h
Ink	Sublimation textile ink, Reactive textile ink, Pigment textile ink, Acid textile ink	
Max. Print Width	3200mm	
Max. Media Width	3300mm	
Resolution	1440dpi (max)	
Real Time Tracking	None	
Media Feeder	Yes	
Media Take-up	Yes	
Material	max. weight	200kgs
	application type	Weave or knit cotton, fax silk, heat transfer paper, polyester, cashmere, towel ect.
Auto cleaning system	Yes	
Interface	USB2.0	
Power/Power Voltage	AC220-240V 50-60HZ or AC110-120V 50-60HZ	
Control Software	Print Console	
Rip Software	Iprint 3.0	
Operation System	MS Windows XP & Windows 7	
Printing Environment	Temperature : 20-25 centi degree, Humidity : 40-60%	
Picture Type	JPG PSD TIF	
Printer Dimension	W5000*D2000*H1500mm	W3600*D2000*H1500mm
Packing Dimension	W5020*D2020*H1520mm	W3620*D2020*H1520mm
Net Weight	1120kgs	870kgs
Gross Weight	1300kgs	1100kgs

Technical Specification

Print head	Two DX5 Drop-on-demand Micro-Piezo Print Heads	
Color	Double 4 color/quadruple 4 color, 8 color/double 8 color(White color optional)	
Printing Height	63mm	
Printing Weight	Nondestructive precision 100KG	
Printing Size	1000mm*1500mm	
Lifting Function	Carriage lifting intelligently, height adjusting by electronic auto/manual intelligent inductive measure	
Resolution	2880DPI*1440DPI*720DPI*350DPI	
Number of Printhead	1	
Print Speed	2 pass	22.5m ² /h
	4 pass	15m ² /h
	8 pass	7.5m ² /h
Material	Weave or knit cotton, flax silk, polyester, cashmere, towel, leather, Garment, ect.	
Ink	Sublimation textile ink, Reactive textile ink, Pigment textile ink, Acid textile ink	
Interface	USB	
Power	AC220/110±10.50HZ-60HZ P450W	
Rip Software	Ultraprint RIP	
Printing Environment	Temperature 15-35 degrees, Humidity 20-80%	
Picture Type	TIFF (RGB&CMYK), BMP, PDF, EPS, JPEG	
Printer Dimension	2.14m*2.14m*1.20m	