




Direct Textile Printer FP-740 & FP-1260

• Features



- Equipped Epson DX8/5113 Head

Latest Epson core printed core print head boost the print speed into the sky. Flagship model DX8 reduce maintenance cost dramatically.

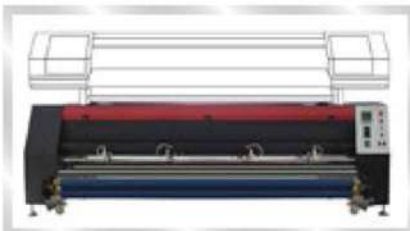


- Heating cutter (Optional)

A unique small device that saves time for finishing process.



- Integrated Sealed Heating Oven

20%+ energy saving,
Integrated ventilator saves space

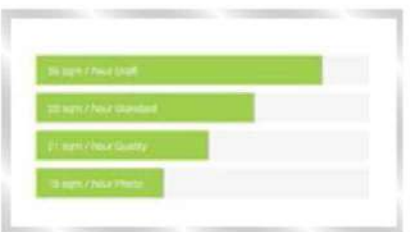

- Unsurpassed Print Speed

This model has 50% increased in speed, that means a lot of savings for a print company that requires multiple flag printers

Note :

Due to keeping innovation, the specification and Machine pictures or color are subject to alteration without notice!



- Advanced Media Handling

New feed adjuster system for even tensioning to prevent skewing



• Specification

Model No.		FP-740	FP-740C	FP-1260	Fp-1260C
Print head	Type	Dual Epson 5113 (DX5 Optional)	Dual Epson DXB	Dual Epson 5113 (DX5 Optional)	Dual Epson DX8
	Nozzles	1440 Nozzles per head			
	Height	2-8 mm Above Media Adjustable			
Max printing Width		1.8 meter (74 Inch)		3.2 meter (126 Inch)	
Resolution (dpi)		1440 dpi			
Media		Sublimation Ink : Polyester, Chemical fiber, Urethane Elastic Fiber, 35% Cotton, Heat Transfer Paper Textile Pigment Ink : 100% Cotton Material (not stretchable)			
Ink	Type	Sublimation Ink, Textile Pigment Ink			
	Color	4 Color /Color			
	Droplet	1.5 – 21 pl Variable			
	Cartridge	8x350ml Continuous Ink Supply			
Speed	Draft	36 sqm/h	54 sqm/h	42 sqm/h	60 sqm/h
	Standard	28 sqm/h	40 sqm/h	32 sqm/h	42 sqm/h
	Quality	21 sqm/h	26 sqm/h	24 sqm/h	30 sqm/h
	Photo	15 sqm/h	18 sqm/h	18 sqm/h	24 sqm/h
Feed & take up		Automatic Media Feeding & Take up System			
Cleaning		Automatic Cleaning, Anti-Clogging Flash Function 7 Capping System			
Heating System		Pre/Post Heater Equipped			
Cooling System		Cooling Fan Equipped			
Environmental		Temperature: 20-28 , Humidity: 40%-60%			
Rip Software		Maintop/ Photoprint			
Control Software		SinoColor Print Console			
Interface		USB3.0			
Operation System		Windows 7/XP			
Power		Machine 50/60HZ, 110 / 220V, 2000W			
Size	Machine	L2960 x W800 x H1270 mm / 300KG		L4360 x W800 x H1270 mm / 530KG	
	Packing	L3060 x W900 x H700 mm / 420KG		L4460 x W900 x H700 mm / 680KG	